


# nora wall base

Delivering a consistent height and toe dimension you can depend on and exuding a professional appearance that adds that final touch to your installation.

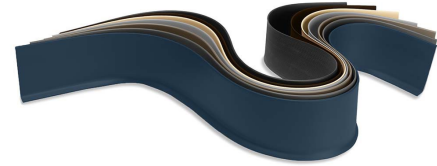

## **Product Construction Specifications**

Product: nora® wall base, Article 820

Material Composition: Thermoplastic rubber with natural fillers and environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium, or mercury.

Material Size:

- Length: 36.6 m (~120 ft)
- Depth: 12.7 mm (~0.5 in)
- Height: 102 mm (~4 in)
- Thickness: 3.175 mm (~0.125 in)

Composition: Heterogeneous rubber compound

Colors: 20 Standard

Surface: Smooth

## **Performance Standards**

ASTM F1861 Standard Specification for Resilient Wall Base	Type TP: Thermoplastic Rubber, Group 2
Flammability (E648/NFPA 253): ≥ 0.45 watts/sq. cm for Class 1 is required	NBSIR 75 950, 0.99
Smoke Density (ASTM E662/NFPA 258): < 450 is required	NBS, 258 (flaming) and 273 (non-flaming)
Bacteria Resistance (ASTM E2180/ASTM G21):	Resistant to bacteria, fungi, and micro-organism activity

## **Health + Environmental Specifications**

Total Recycled Content (Pre Consumer): 32%

Indoor Air Quality: GREENGUARD Gold Certified for low VOC emissions in compliance with CDPH 01350

LEED v4: Contributes to multiple IEQ and MR credits

Material Composition: Free of added formaldehyde, lead, and heavy metals

## **Installation**

Site Conditions: The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.

Adhesive: Use standard wall base adhesive; nora does not manufacture base adhesive.

Unique Characteristics:

- Superb flexibility, scratch, and scuff resistance
- No color drifts and no dye lots
- UV resistance, color will not fade
- Ribbed back design for more secure adhesion
- Micro squared angled up-cut to minimize joint visibility

- Stable dimensions - height, toe, gauge, etc.
- Reinforced cove for greater durability in the toughest applications
- Long runs with minimal seams
- Outside corners must be heated and formed; do not gouge and bend
- Alternate sizes, styles, and formats available (0.125-in thickness); minimum quantities and lead times apply (2.5 in & 4 in coved- or straight-base = 120 ft; 6 in coved- or straight-base = 96 ft)
- Custom color matching possible; minimum quantities and lead times apply

**Important note:** nora wall base is intended to complement our floor coverings and will not match exact color due to variation in product recipes and production batches. Please do not specify or order solely using color names as a guide to color, as names are often shared across multiple products. We recommend ordering samples of each product prior to selection for the best results. Custom color matching is available.

For complete installation instructions refer to the nora Installation Instructions.

### **Care and Cleaning**

Refer to the nora Maintenance Guidelines.

### **Wheel Types**

No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be Type A  $\leq 90$ .

### **Storage**

nora flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets must remain intact with sheet goods standing on end, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

### **Warranty**

Limited 5-year warranty. Refer to the nora Limited Warranty - Americas.

Current nora Installation Instructions, Guide Specifications, Maintenance Guidelines, and Limited Warranties, can be found at [www.nora.com](http://www.nora.com).

nora®, norament®, and noraplan® are trademarks owned by nora systems GmbH and registered in the United States, Canada, and other countries. All other trademarks are the property of their respective owners.

Updated: April 2024